



# TRUCK & BUS RADIAL TIRES

QINGDAO KELUCK TYRE CO.,LTD  
Add.: Room 2117 , MINGHUI BUILDING , Qingdao, China  
Tel.: +86 0532-67788323  
E-mail : info@keluckyre.com





**100** STEER / TRAILER



- Wide tread for long life and high speed running.
- Fuel efficient with lower rolling resistance.
- Reduced operational costs.
- Suitable for steer and trailer wheels.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
9.00R20	16	144/142 L	1018	260	7.0	14.5	2800/2650	900
10.00R20	18	149/146 L	1046	278	7.5	15.0	3250/3000	930
11.00R20	18	152/149 L	1081	290	8.0	15.5	3550/3250	930
12.00R20	18	154/151 L	1117	312	8.5	15.5	3750/3450	830
11R22.5	16	146/143 M	1048	268	8.25	15.0	3000/2725	830
315/80R22.5	20	157/154 M	1075	314	9.00	15.0	4125/3750	900

**366** STEER / TRAILER



- Tapered tread grooves resist stone trapping.
- Enhanced resistance to rib tear and exceptional wear life.
- Designed for city and highway service.
- Suitable for steer and trailer wheels.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
8R22.5	14	130/128 M	936	210	6.00	13.5	1900/1800	830
9R22.5	16	139/137 M	971	232	6.75	14.5	2430/2300	930
10R22.5	16	144/142 M	1015	252	7.50	15.5	2800/2650	900
11R22.5	16	146/143 M	1051	268	8.25	16.5	3000/2725	830
11R24.5	16	149/146 L	1103	275	8.25	16.5	3250/3000	830
12R22.5	18	152/149 M	1081	298	9.00	15.0	3550/3250	930
13R22.5	18	154/151 L	1112/1122	300	9.75	13.0/16.5	3750/3450	830
205/75R17.5	14	124/122 M	749	212	6.00	12.5	1600/1500	760
215/75R17.5	14	126/124 M	761	222	6.00	12.5	1700/1600	700
	16	135/133 J	761	222	6.00	12.5	2180/2060	860
225/75R17.5	16	129/127 M	776	222	6.75	12.5	1850/1750	830
235/75R17.5	16	132/130 M	792	242	6.75	13.0	2000/1900	775
	18	143/141 J	792	242	6.75	13.0	2725/2575	875
245/70R17.5	16	136/134 M	781	249	7.50	12.5	2240/2120	850
	18	143/141 J	781	249	7.50	12.5	2725/2575	900
225/70R19.5	14	128/126 M	804	225	6.75	13.0	1800/1700	760
245/70R19.5	16	136/134 M	769	249	7.50	12.5	2240/2120	830
	18	143/141 J	769	249	7.50	12.5	2725/2575	875
265/70R19.5	16	140/138 M	866	259	7.50	14.0	2500/2360	830
	18	143/141 J	866	259	7.50	14.0	2725/2575	850
285/70R19.5	16	146/144 M	888	287	8.25	14.0	3000/2800	900
	18	150/148 J	888	287	8.25	14.0	3350/3150	900
255/70R22.5	14	138/134 M	926	245	7.50	13.0	2360/2120	760
	16	140/137 M	926	245	7.50	13.0	2500/2300	830
295/80R22.5	16	152/148 M	1038	298	9.00	16.5	3550/3150	850
	18	154/151 M	1038	298	9.00	16.5	3750/3450	900
315/70R22.5	18	154/150 M	1011	311	9.00	15.5	3750/3350	900
315/80R22.5	20	157/154 M	1071	314	9.00	16.5	4125/3750	900

**101** ALL POSITION



- Wide tread for long life and high speed running.
- Fuel efficient with lower rolling resistance.
- Excellent decrease the total operation costs.
- Suitable for steer and trailer wheels.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
6.50R16LT	12	110/105 L	747	182	5.50F	9.0	1060/925	670

**311** ALL POSITION



- Fuel efficient with lower rolling resistance.
- Excellent traction and wet weather handling.
- Wider tread and complex groove angles offers enhanced tyre life with superior resistance to irregular wear.
- Suitable for all wheel positions.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 L	1081	290	8.0	16.0	3550/3250	930
12.00R20	18	154/151 L	1117	312	8.5	16.5	3750/3450	830
12R22.5	18	152/149 L	1081	298	9.00	16.0	3550/3250	930

**356** ALL POSITION



- Exceptional mileage and resistance to irregular wear.
- Suitable for steer wheels and highway road application.
- Excellent resistance to rib-tearing.
- Excellent driving stability and durability.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1079	290	8.0	14.8	3550/3250	930

**366+** STEER / TRAILER



- Tapered tread grooves resist stone trapping.
- Enhanced resistance to rib tear and exceptional wear life.
- Designed for city and highway service.
- Suitable for steer and trailer wheels.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
275/70R22.5	18	148/145 M	956	278	8.25	16.5	3150/2900	900



### 368 ALL POSITION

- Excellent resistance to irregular wear.
- Suitable for steer wheels and highway road application.
- Exceptional mileage and resistance to irregular wear.
- Excellent driving stability and durability.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1079	290	8.0	14.8	3550/3250	930

### 396 STEER / TRAILER

- Wide base highway tyre designed for steer and trailer wheels.
- Low profile for high speed and control.
- Provides excellent resistance to irregular wear.
- Popular fitment in on-road, line haul operations.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
385/65R22.5	20	160K	1070	384	11.75	16.5	4500	900

### 397 DRIVE

- Deep tread for extra-long life.
- Cut resistant.
- Low profile and wide tread for super stability and durability.
- Very popular fitment for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
385/65R22.5	20	160K	1070	384	11.75	16.5	4500	900

### 706 STEER / TRAILER

- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good anti-sideslip.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
385/55R19.5	18	156 J	916	387	12.25	15.5	4000	900
385/55R22.5	18	158 L	992	387	12.25	15.5	4250	850
385/55R22.5	20	160 J	992	387	12.25	15.5	4500	900

### 668 ALL POSITION

- Exceptional mileage and resistance to irregular wear.
- Excellent driving stability and durability.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
315/80R22.5	20	157/154 M	1069	314	9.00	14.5	4125/3750	900

### 716 STEER / TRAILER

- Wide tread for long life and high speed running.
- Fuel efficient with lower rolling resistance.
- Reduced operational costs.
- Suitable for steer and trailer wheel positions.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
425/65R22.5	18	162 L	1118	430	13.00	16.5	4750	760
425/65R22.5	20	165 K	1118	430	13.00	16.5	5150	830

### 788 DRIVE

- Suitable tyre for trucks and buses.
- Unique pattern design offers superior resistance to irregular wearing.
- High resistance to cuts and stone damage.
- Suitable for drive wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 M	1089	298	9.00	20.5	3550/3250	930

### 766 STEER / TRAILER

- Exceptional mileage and resistance to irregular wear.
- Excellent high speed stability and durability.
- Excellent resistance to rib-tearing.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 M	1078	298	9.00	15.0	3550/3250	930
295/80R22.5	16	152/148 M	1035	298	9.00	15.0	3750/3450	850
	18	154/151 M	1035	298	9.00	15.0	3750/3450	900
315/80R22.5	20	157/154 M	1068	314	9.00	15.0	4125/3750	900



# 755 DRIVE

- Designed for drive axle trucks and buses.
- Unique tie-bar pattern design offers superior resistance to irregular wearing and block tearing.
- Provides longer tread life and high speed durability.
- High mileage and speed with lower heat build up.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 L	1059	276	7.50	21.5	3250/3000	930
12R22.5	18	152/149 M	1092	298	9.00	20.0	3550/3250	930
295/80R22.5	16	152/148 M	1049	298	9.00	20.0	3550/3150	850
	18	154/151 M	1049	298	9.00	20.0	3750/3450	900
315/80R22.5	20	157/154 M	1074	310	9.00	18.0	4125/3750	900

# 600 STEER

- Fuel efficient with lower rolling resistance.
- Wide tread for long life and high speed durability.
- Highly resistant to irregular wear.
- Suitable for steer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	16	146/143 M	1048	275	8.25	15.0	3000/2725	830
11R24.5	16	149/146 L	1100	275	8.25	15.0	3250/3000	830
285/75R24.5	16	147/144 L	1049	280	8.25	15.0	3075/2800	830
295/75R22.5	16	146/143 L	1010	295	9.00	15.0	3000/2725	830

# 786 STEER / TRAILER

- Exceptional mileage and resistance to irregular wear.
- Excellent high speed stability and durability.
- Excellent resistance to rib-tearing.
- Suitable for steer and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R22	18	154/151 L	1129	288	8.0	15.0	3750/3450	930
11R22.5	16	146/143 M	1048	268	8.25	15.0	3000/2725	830
12R22.5	18	152/149 M	1078	298	9.00	15.0	3550/3250	930
13R22.5	18	154/151 L	1112/1119	300	9.75	13.0/15.0	3750/3450	830
295/80R22.5	16	152/148 M	1035	298	9.00	15.0	3550/3150	900
	18	154/151 M	1035	298	9.00	15.0	3750/3450	900
315/80R22.5	20	157/154 M	1075	314	9.00	15.0	4125/3750	900

# 678 TRAILER

- Fuel efficient with lower rolling resistance.
- Wide tread for long life and high speed durability.
- Highly resistant to irregular wear.
- Suitable for steer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	14	144/142 M	1038	275	8.25	9.8	2800/2650	720
	16	146/143 M	1038	275	8.25	9.8	3000/2725	830
11R24.5	14	146/143 M	1090	275	8.25	9.8	3000/2725	720
	16	149/146 L	1090	275	8.25	9.8	3250/3000	830
285/75R24.5	14	144/141 M	1039	280	8.25	9.8	2800/2575	760
	16	147/144 L	1039	280	8.25	9.8	3075/2800	830
295/75R22.5	14	144/141 M	1000	295	9.00	9.8	2800/2575	760
	16	146/143 L	1000	295	9.00	9.8	3000/2725	830


# 785 DRIVE

- High mileage and speed with lower heat build up.
- Unique tie-bar pattern design offers superior resistance to irregular wearing and block tearing.
- Provides longer tread life and high speed durability.
- Suitable for drive axle trucks and buses.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
1100R22	18	154/151 L	1143	288	8.0	22.0	3750/3450	930
11R22.5	16	146/143 M	1062	275	8.25	18.0	3000/2725	830
12R22.5	18	152/149 M	1092	298	9.00	18.0	3550/3250	930
13R22.5	18	154/151 L	1114/1133	300	9.75	14.0/18.0	3750/3450	830
205/75R17.5	14	124/122 M	753	212	6.00	14.5	1600/1500	760
215/75R17.5	14	126/124 M	765	222	6.00	14.5	1700/1600	700
225/75R17.5	16	129/127 M	782	222	6.75	15.5	1850/1750	830
235/75R17.5	16	132/130 M	797	242	6.75	15.5	2000/1900	775
245/70R17.5	16	136/134 M	787	249	7.50	15.5	2240/2120	850
225/70R19.5	14	128/126 M	807	225	6.75	14.5	1800/1700	760
245/70R19.5	16	136/134 M	838	249	7.50	15.5	2240/2120	830
265/70R19.5	16	140/138 M	869	259	7.50	15.5	2500/2360	830
275/70R22.5	18	148/145 M	960	278	8.25	18.5	3150/2900	900
285/70R19.5	16	146/144 M	893	287	8.25	16.5	3000/2800	900
295/80R22.5	16	152/148 M	1049	298	9.00	18.0	3550/3150	850
295/80R22.5	18	154/151 M	1049	298	9.00	18.0	3750/3450	900
315/70R22.5	18	154/150 M	1018	311	9.00	19.0	3750/3350	900
315/80R22.5	20	157/154 M	1082	310	9.00	18.0	4125/3750	900



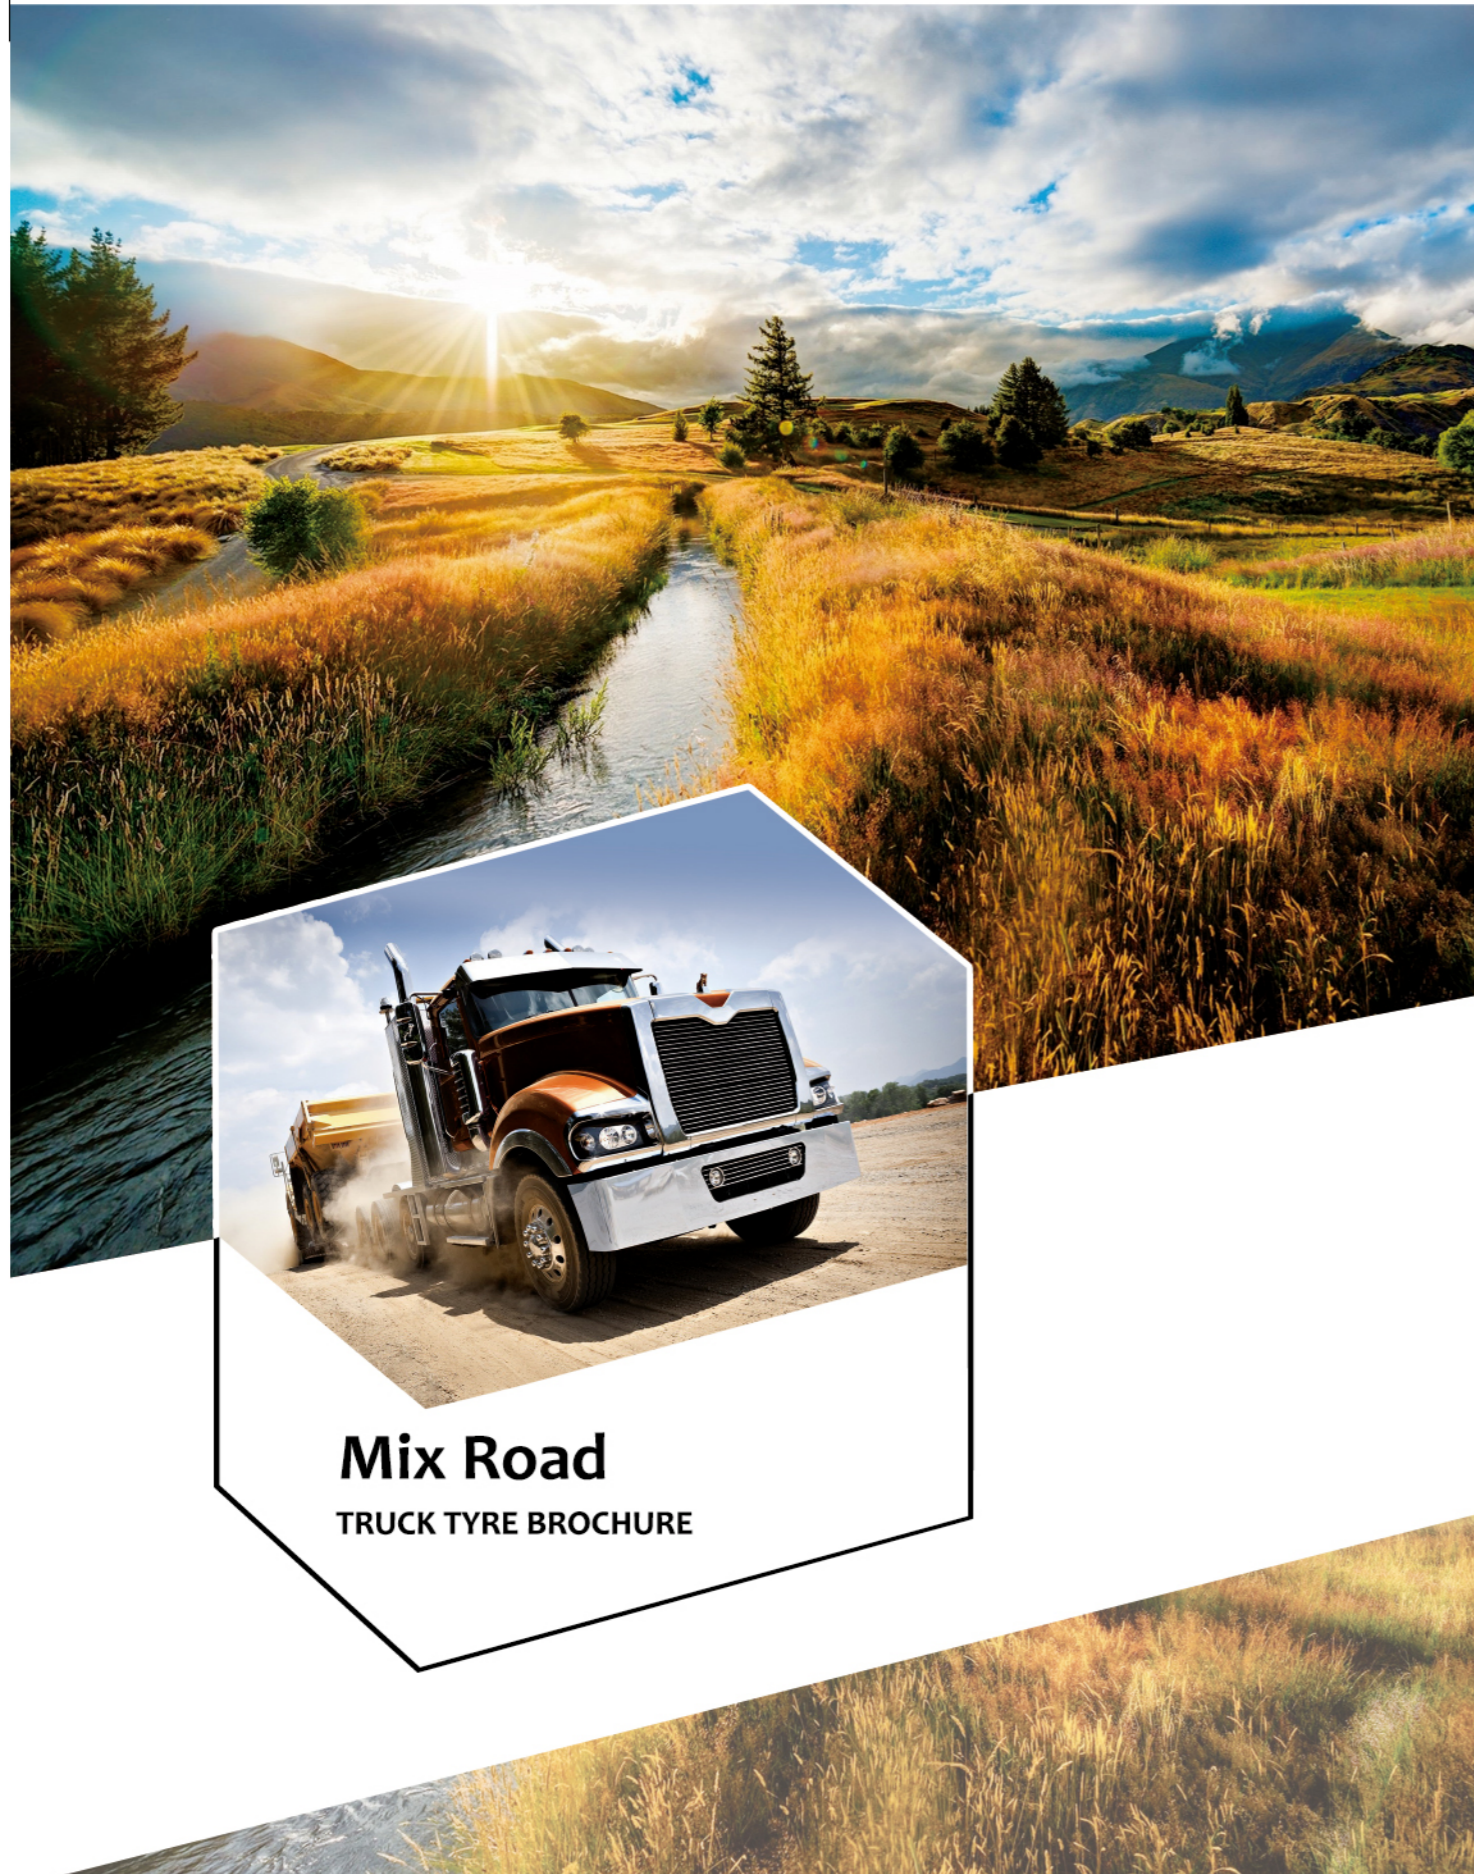

**Mix Road**  
TRUCK TYRE BROCHURE

**300** ALL POSITION

- Resistant to cuts and stone retention.
- Wide tread for long life and uniform wear.
- Excellent driving stability, traction and durability.
- All position tyre for city and highway service.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
6.50R16LT	12	110/105 L	749	182	5.50F	10.0	1060/925	670
7.00R16LT	14	118/114 L	775	202	5.50F	13.0	1320/1180	770
7.50R16LT	16	124/120 L	801	220	6.00G	13.0	1600/1400	870
8.25R16LT	16	128/124 M	851	233	6.50H	12.5	1800/1600	770
8.25R20	16	139/137 L	963	233	6.50	14.5	2430/2300	930
9.00R20	16	144/142 L	1018	260	7.00	15.5	2800/2650	900
10.00R20	18	149/146 L	1049	278	7.50	16.5	3250/3000	930
11.00R20	18	152/149 L	1083	290	8.00	17.0	3550/3250	930
12.00R20	18	154/151 L	1119	312	8.50	17.5	3750/3450	830
12.00R24	20	160/157 K	1210	310	8.50	14.5	4500/4125	900
11R22.5	14	144/142 M	1049	275	8.25	15.5	2800/2650	720
	16	146/143 M	1049	275	8.25	15.5	3000/2725	830
12R22.5	18	152/149 M	1082	298	9.00	17.0	3550/3250	930
13R22.5	18	154/151 L	1114/1124	300	9.75	14.5/17.5	3750/3450	830
315/80R22.5	20	157/154 M	1072	310	9.00	17.0	4125/3750	900

**301** ALL POSITION

- Wide tread is resistant to stone retention.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good traction.
- Suitable for all wheels position.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 L	1081	290	8.0	14.5	3550/3250	930

**303** ALL POSITION

- Resistant to cuts and stone retention.
- Wide tread for long life and uniform wear.
- Excellent driving stability, traction and durability.
- All position tyres for city and highway service.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12.00R24	20	160/157 K	1210	310	8.5	14.5	4500/4125	900



## 302 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wide tread is resistant to stone retention.
- Suitable for drive and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 L	1058	278	7.5	19.5	3250/3000	930
11.00R20	18	152/149 L	1086	290	8.0	17.0	3550/3250	930
12.00R20	18	154/151 L	1128	310	8.5	17.0	3750/3450	830
12R22.5	18	152/149 M	1082	298	9.00	17.0	3550/3250	930

## 306 DRIVE

- High traction and cut resistant.
- Suitable for drive wheels on logging, construction and mining vehicles.
- Good self cleaning properties.
- Durability on rough surfaces.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
8.25R16LT	16	128/124 M	851	233	6.50H	13.0	1800/1600	770
10.00R20	18	149/146 L	1054	278	7.5	17.5	3250/3000	930
11.00R20	18	152/149 L	1088	298	8.0	18.0	3550/3250	930
12.00R20	18	154/151 L	1124	312	8.5	18.5	3750/3450	830

## 307 ALL POSITION

- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good anti-sideslip.
- Suitable for all wheels position.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 L	1083	290	8.0	17.5	3550/3250	930
12.00R20	18	154/151 L	1119	312	8.5	18.0	3750/3450	830

## 308 DRIVE

- Wide deep tread pattern allows for a long wear life.
- High level of traction for on and off road.
- Cut resistant with good self cleaning properties.
- Suitable for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
9.00R20	16	144/142 K	1021	260	7.0	17.0	2800/2650	900
10.00R20	18	149/146 K	1054	278	7.5	18.0	3250/3000	930

## 358 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1091	290	8.0	18.5	3550/3250	930
12.00R20	18	154/151 K	1127	312	8.5	20.0	3750/3450	830

## 386 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive and trailer wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
7.00R16LT	14	118/114 K	780	202	5.50F	15.0	1320/1180	770
7.50R16LT	14	122/118 K	806	220	6.00G	15.0	1500/1320	770
7.50R16LT	16	124/120 K	806	220	6.00G	15.0	1600/1400	870
8.25R16LT	16	128/124 K	860	233	6.50H	15.5	1800/1600	770
8.25R20	16	139/137 K	970	233	6.5	16.5	2430/2300	930
9.00R20	16	144/142 K	1026	260	7.0	18.5	2800/2650	900
10.00R20	18	149/146 K	1055	278	7.5	19.5	3250/3000	930
11.00R20	18	152/149 K	1095	290	8.0	20.5	3550/3250	930
12.00R20	18	154/151 K	1130	312	8.5	21.5	3750/3450	830



# 378 DRIVE

- Suitable for steer and drive wheel fitment.
- Suitable for both on and off road applications.
- Super level of traction.
- Resistant to cuts and stone retention.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 K	1094	290	8.0	20.0	3550/3250	930
12.00R20	18	154/151 K	1130	312	8.5	21.5	3750/3450	830

# 388 DRIVE

- Wide deep tread pattern allows for a long wear life.
- High level of traction for on and off road.
- Cut resistant with good self cleaning properties.
- Suitable for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 K	1052	278	7.5	18.0	3250/3000	930
11.00R20	18	152/149 J	1092	290	8.0	19.0	3550/3250	930
12.00R20	18	154/151 K	1128	312	8.5	20.5	3750/3450	830

# 767 DRIVE

- Resistance to irregular wear.
- High level of traction for on and off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive wheels.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 L	1085	305	9.00	21.0	3550/3250	930

# 607 DRIVE

- Cut resistant with good self-cleaning properties.
- Resistance to irregular wear.
- Very popular fitment for drive wheel.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	14	144/142 M	1057	275	8.25	19.5	2800/2650	720
11R22.5	16	146/143 L	1057	275	8.25	19.5	3000/2725	830
11R24.5	14	146/143 M	1109	275	8.25	19.5	3000/2725	720
11R24.5	16	149/146 L	1109	275	8.25	19.5	3250/3000	830

# 617 DRIVE

- Wide deep tread pattern allows for a long wear life.
- Excellent performance for driving and braking.
- New tread design giving excellent traction and cut resistance.
- Very popular fitment for drive wheel.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	14	144/142 M	1064	275	8.25	23.0	2800/2650	720
11R22.5	16	146/143 L	1064	275	8.25	23.0	3000/2725	830
11R24.5	14	146/143 M	1116	275	8.25	23.0	3000/2725	720
11R24.5	16	149/146 L	1116	275	8.25	23.0	3250/3000	830

# 660 DRIVE

- All position tyre suitable for both on and off road applications.
- Cut resistant tread compound.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Stone ejectors in the tread prevents stone retention which can lead to casing damage.



SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11R22.5	16	146/143 M	1063	275	8.25	22.5	3000/2725	830
11R24.5	16	149/146 L	1115	275	8.25	22.5	3250/3000	830
285/75R24.5	16	147/144 L	1064	280	8.25	22.5	3075/2800	830
295/75R22.5	16	146/143 L	1025	295	9.00	22.5	3000/2725	830



# 700 DRIVE



- Stone ejectors in the tread prevents stone retention which can lead to casing damage.
- New tread design giving excellent traction and cut resistance.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for both drive and trailer fitment.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 K	1054	278	7.5	18.0	3250/3000	930
13R22.5	18	154/151 K	1114/1131	300	9.75	14.0/21.0	3750/3450	830
315/80R22.5	18	154/151 K	1076	314	9.00	20.0	3750/3450	830
12R22.5	18	152/149 K	1088	298	9.00	20.0	3550/3250	930
295/80R22.5	18	154/151 K	1045	298	9.00	19.0	3750/3450	900
315/80R22.5	20	157/154 K	1076	312	9.00	20.0	4125/3750	900

# 787 ALL POSITION



- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good traction.
- Suitable for all wheel positions.


SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12.00R24	20	160/157 K	1210	313	8.5	14.5	4500/4125	900

# 886 ALL POSITION



- Wide tread enables long wear life and stone retention resistance.
- Deep tread for extra-long life and good wet traction.
- Combines durability in mild off road and long life on-road with good traction.
- Suitable for all wheels position.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
12R22.5	18	152/149 M	1080	298	8.25	16.0	3550/3250	930

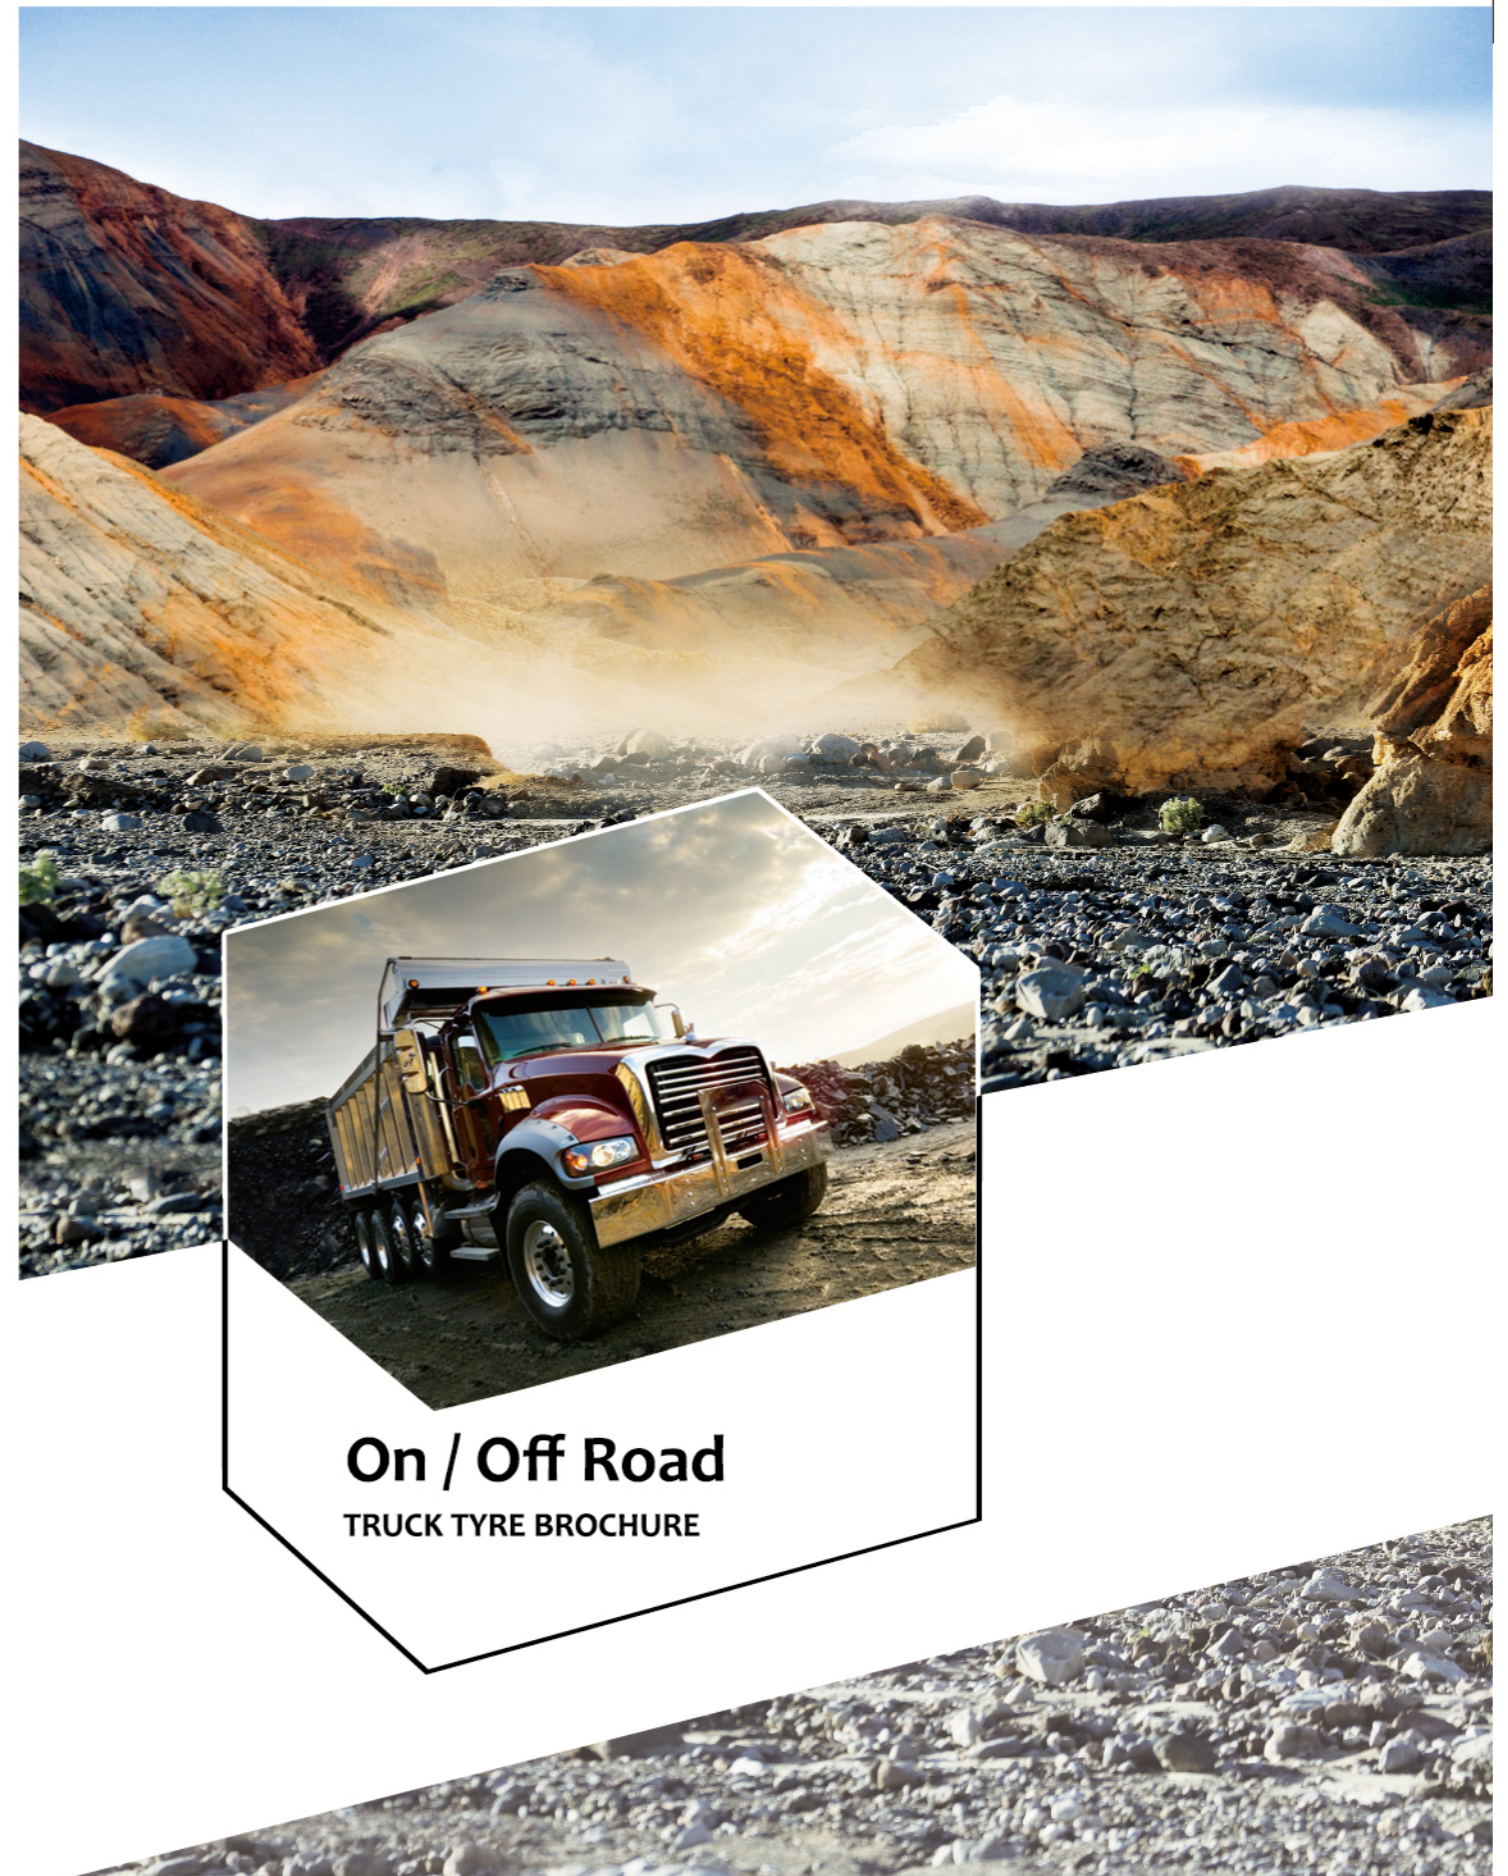

**On / Off Road**  
TRUCK TYRE BROCHURE



## 309 ALL POSITION



- All terrain tyres suitable for all position fitment.
- Super level of traction.
- Resistant to cuts and stone retention.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 J	1060	278	7.5	20.5	3250/3000	930
11.00R20	18	152/149 J	1094	290	8.0	21.0	3550/3250	930
12.00R20	18	154/151 J	1130	310	8.5	21.5	3750/3450	830
12.00R24	20	160/157 K	1230	316	8.5	21.0	4500/4125	900

## 369 ALL POSITION



- Wide tread enables long wear life with stability and durability.
- Deep tread for extra-long life and excellent traction.
- Cut resistance with good self cleaning properties in harsh conditions.
- Suitable for all wheel position on mining vehicles.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
11.00R20	18	152/149 D	1100	290	8.0	24.0	3550/3250	930
12.00R20	18	154/151 D	1127	312	8.5	24.0	3750/3450	830

## 379 ALL POSITION



- Wide tread enables long wear life with stability and durability.
- Deep tread for extra-long life and excellent traction.
- Cut resistance with good self cleaning properties in harsh conditions.
- Suitable for all wheel position on mining vehicles.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
8.25R20	16	139/137 D	973	233	6.5	18.0	2430/2300	930
11.00R20	18	152/149 D	1100	290	8.0	23.0	3550/3250	930
12.00R20	18	154/151 D	1135	312	8.5	24.0	3750/3450	830
8.25R16LT	16	128/124 D	865	233	6.50H	18.0	1800/1600	770

## 389 DRIVE



- Resistant to cuts and stone retention.
- High level of traction for off road applications.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive wheels.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
7.00R16LT	14	118/114 D	782	202	5.50F	16.0	1320/1180	770
7.50R16LT	16	124/120 D	808	220	6.00G	16.0	1600/1400	870
8.25R16LT	16	128/124 D	865	233	6.50H	18.0	1800/1600	770
9.00R20	16	144/142D	1028	260	7.0	19.5	2800/2650	900
10.00R20	18	149/146 D	1060	278	7.5	22.0	3250/3000	930
11.00R20	18	152/149 D	1100	290	8.0	23.0	3550/3250	930
12.00R20	18	154/151 D	1135	312	8.5	24.0	3750/3450	830

## 399 DRIVE



- Resistant to cuts and stone retention.
- High level of traction for off road.
- Wider and deeper tread using a special rubber compound designed to extend the life of the tyre.
- Suitable for drive wheels.

SIZE	P.R.	LI&SS	Diameter	Section Width	Std. Rim	Tread Depth	Load Capacity	Inflation Pressure
			(mm)	(mm)		(mm)	(kg)	(kPa)
10.00R20	18	149/146 D	1076	278	7.5	26.0	3250/3000	930
11.00R20	18	152/149 D	1104	290	8.0	26.0	3550/3250	930
12.00R20	18	154/151 D	1140	312	8.5	26.0	3750/3450	830